
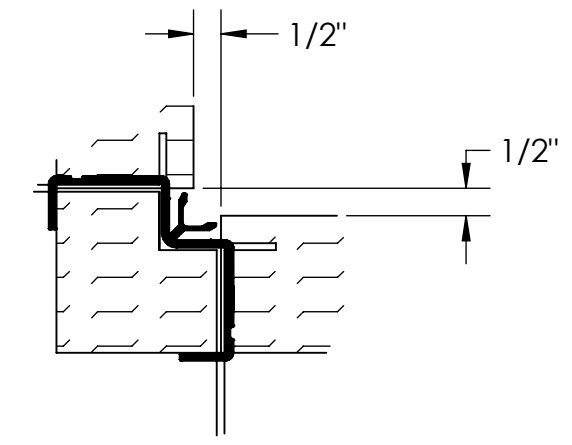


8 7 6 5 4 3 2 1


D  
C  
B  
A

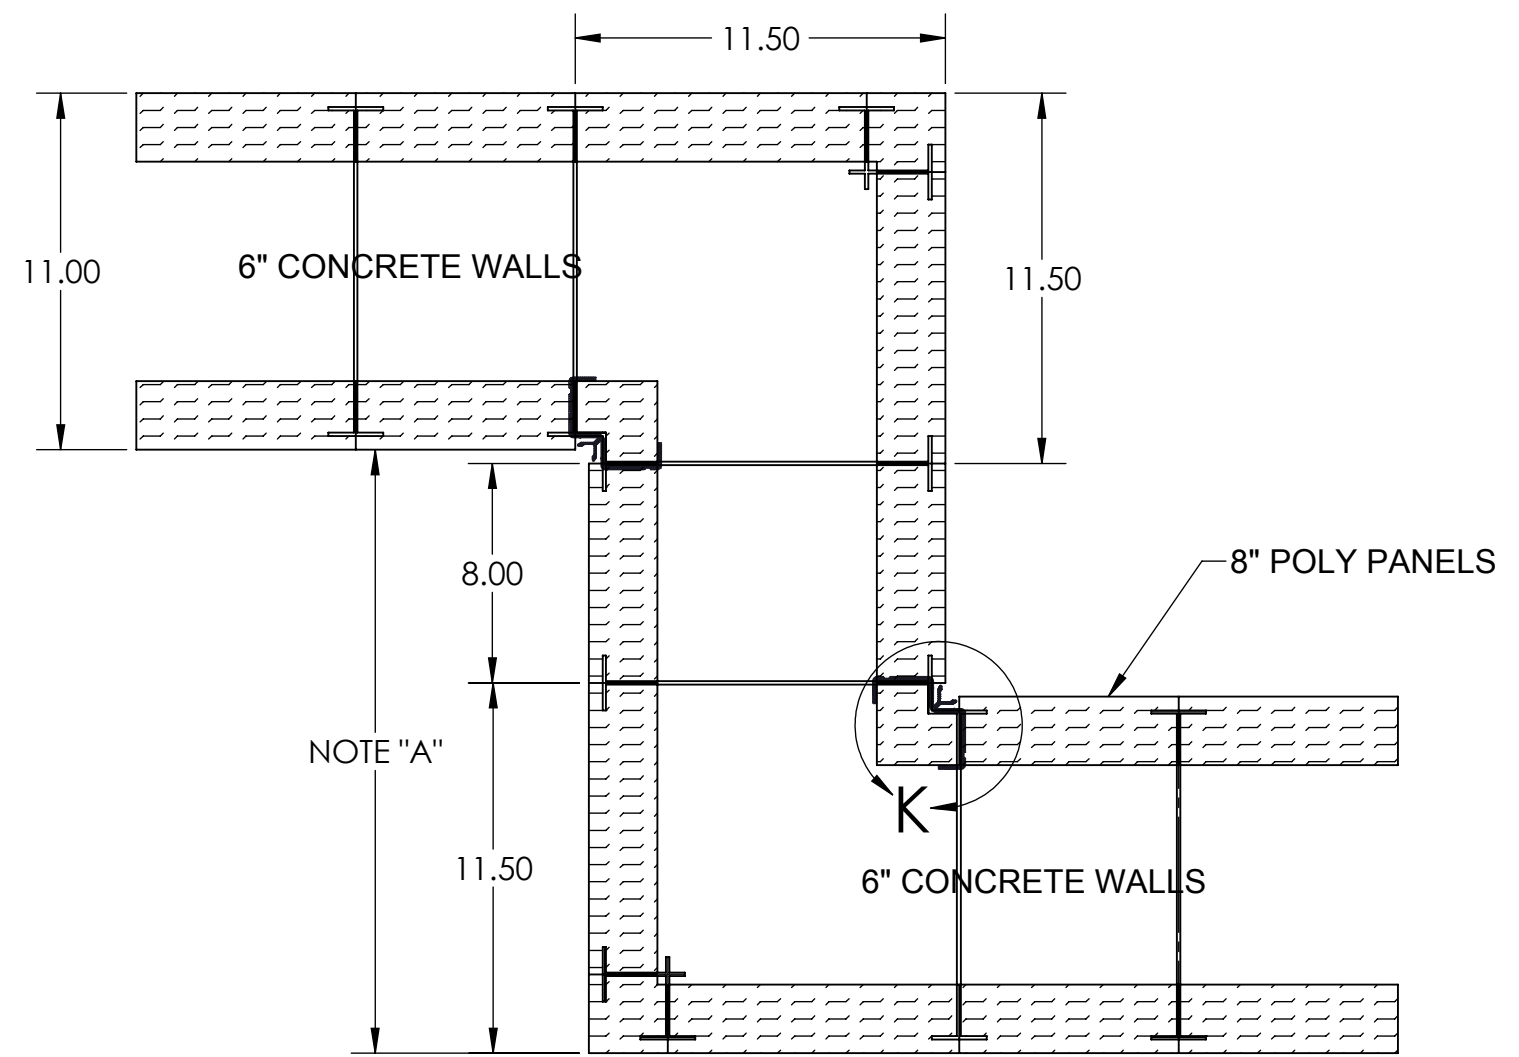

DETAIL K  
SCALE 2 : 7

**CONFIDENTIAL**  
THE INFORMATION ON THIS DRAWING IS STRICTLY CONFIDENTIAL AND IS NOT TO BE DISCLOSED, COPIED, OR DISTRIBUTED.

**NOTE "A"**  
-OPTIMAL DIMENSIONS FOR 6" CONCRETE WALL BUMP OUT CORNER ARE: 12",20",28",36",44",52" CONTINUE EVERY 8"

	MATERIAL: EXPANDED POLYSTYRENE 1.5 LB/CUBIC FT NOMINAL		<b>THERMOFORM SYSTEM</b>	
	UNLESS OTHERWISE SPECIFIED:		TITLE: OPTIMAL BUILDING LAYOUT DIMENSIONS FOR 6" CONCRETE WALLS	
EPS blocks are to be stabilized at ambient temperature for a minimum of 72 hours before the cutting/fabrication process. Optional forced curing for 24 hours at 140 degrees Fahrenheit prior to the cutting/fabrication process is an acceptable alternative.		DIMENSIONS ARE IN INCHES		SIZE <b>B</b>
DATE: 01-09-2015		DWG. NO. N/A		REV <b>1</b>
DRAWN BY: LME		SCALE: 1:7		SHEET 1 OF 1

8 7 6 5 4 3 2 1